

CHCN*A*V

i80

SMART GNSS RECEIVER



SURVEYING & ENGINEERING

HIGH-PERFORMANCE GNSS RECEIVER EXTENDED CONNECTIVITY

The i80 GNSS is a highly versatile GNSS receiver designed to provide robust accuracy even in harsh environments to any demanding surveying project. Its full-GNSS 220-channel GNSS core engine starts outputting survey-grade centimeter RTK results within seconds to significantly increase your productivity in the field.

The innovative hot swappable batteries, high resolution LCD display and rugged design make the i80 indispensable for demanding survey applications. Its internal 3.75G network modem, UHF Rx/Tx module, Bluetooth and Wi-Fi connectivity allow seamless configuration to perfectly match your survey project requirements.

FULL GNSS FOR HIGH PRODUCTIVITY

Combining GPS, Glonass, Galileo and BeiDou positioning systems.

Powered by a 220-channel GNSS core engine, the i80 GNSS provides reliable centimeter survey-grade accuracy to any demanding project.

EASY CONFIGURATION AT YOUR FINGERTIPS

With two control buttons and LED status.

The 128 x 64 dpi LCD display gives entire control to the i80 GNSS. Whatever your survey requirements, the various work survey modes -UHF, NTRIP, GNSS data recording can be activated directly in the field.

UNINTERRUPTED OPERATION

3 400 mAh dual hot-swappable batteries.

Dual hot-swappable batteries allow extended full day fieldwork when connected to RTK network services. You can concentrate on your land surveying or topographic project without caring about power drop.

RUGGED TECHNOLOGY

Advanced Linux OS in heavy duty enclosure.

Meeting the stringent IP68 standard to withstand the most demanding environmental conditions, the i80 GNSS cast magnesium chassis secures your investment. It can pair with your preferred 3rd party software seamlessly via a simple configuration web interface.

 PREMIUM VERSATILE
GNSS SOLUTION



**HIGH-PERFORMANCE
IN ANY ENVIRONMENTS**

SPECIFICATIONS

GNSS Characteristics ⁽¹⁾

Channels	220
GPS	L1C/A, L2C, L2E, L5
GLONASS	L1C/A, L1P, L2C/A, L2P, L3
Galileo	E1, E5A, E5B
BeiDou	B1, B2
NavIC (IRNSS)	L1C/A, L5 (QZSS, WAAS, EGNOS,

GNSS Accuracies ⁽²⁾

Real time kinematics (RTK)	Horizontal: 8 mm + 1 ppm RMS
	Vertical: 15 mm + 1 ppm RMS
	Initialization time: < 5 s Initialization reliability: > 99.9%
Network RTK	Horizontal: 8 mm + 0.5 ppm RMS
	Vertical: 15 mm + 0.5 ppm RMS
	Initialization time: < 10 s Initialization reliability: > 99.9%
Post-processing kinematics (PPK)	Horizontal: 8 mm + 1 ppm RMS
	Vertical: 15 mm + 1 ppm RMS
	Initialization time: < 5 s Initialization reliability: > 99.9%
Post-processing static	Horizontal: 2.5 mm + 0.1 ppm RMS
	Vertical: 3.5 mm + 0.5 ppm RMS
SBAS	0.5 m RMS
Code differential	Horizontal: 0.25 m + 1 ppm RMS
	Vertical: 0.50 m + 1 ppm RMS
Time to first fix ⁽³⁾	Cold start: < 45 s
	Hot start: < 10 s
	Signal reacquisition: < 2 s

Hardware

Size (H x W)	124 mm x 140 mm (4.9 in x 5.5 in)
Weight	1.02 kg (2.2 lb)
Environment	Operating: -40°C to +65°C (-40°F to +149°F)
	Storage: -40°C to +85°C (-40°F to +185°F)
Humidity	100% condensation
Ingress protection	IP67 waterproof and dustproof, protected from temporary immersion to depth of 1 m
Shock	Survive a 2-meter pole drop
LCD	128 x 64 dpi sunlight readable
Tilt sensor	Ebubble
	Tilt compensator ⁽⁴⁾

Certifications and Calibrations

FCC Part 15 (class B Device), FCC Part 22, 24, 90; CE Mark; CTick; Bluetooth EPL; IGS & NGS Antenna Calibration; MIL STD 810G, Method 514.7

Communications and Data recording

Network modem	Integrated 3.75G modem
	HSPA+ 21 Mbps (down load), 5.76 Mbps (upload)
	WCDMA 850/900/1700/1900/2100 EDGE/GPRS/GSM 850/900/1800/1900
Wi-Fi	802.11 b/g/n, access point mode
Bluetooth®	V4.1

Ports	2 x 7 pin LEMO port (external power, data download, firmware update, RS232) 1 x UHF antenna port (TNC female)
--------------	--

UHF radio	Standard Internal Rx/Tx: 410 - 470 MHz
	Transmit Power: 0.5 W to 2 W Protocol: CHC, Transparent, TT450 Link rate: 9600 bps to 19200 bps Range: typical 3-5 km, optimal up to 5 km
	FCC Certified Internal Rx/Tx: 403-473 MHz
	Transmit Power: 0.1 W to 1 W Protocol: 3AS, 4FSK, Transparent, TT450 Link rate: 9600 bps to 19200 bps Range: optimal up to 5 km

Data formats	RTCM 2.x, RTCM 3.x, CMR, CMR+, SCMRX
	input and output HCN, HRC, RINEX 2.11, 3.02 NMEA 0183 output NTRIP Client, NTRIP Caster


Data storage	32 GB
---------------------	-------

Electrical

Power consumption	3.2 W (depending on user settings)
Liion battery capacity	2 x 3400 mAh, 7.4 V
Operating time on internal battery ⁽⁵⁾	UHF receive/transmit (0.1 W): 6 h
	Cellular receive only: Up to 9 h Static: Up to 10 h
External power input	9 V DC to 36 V DC



*All specifications are subject to change without notice.
(1) Subject to availability of BDS ICD and Galileo commercial service definition. GLONASS L3, BDS B3 and Galileo E6 will be provided through future firmware upgrade. (2) Accuracy and reliability are determined under clear unobstructed conditions, multi-paths, satellite geometry and atmospheric conditions. Performances assume minimum of 5 satellites, follow up of recommended general GPS practices. (3) Typical observed values. (4) The accuracy of tilt compensator varies with operating environment and electromagnetic pollution. (5) Battery life is subject to operating temperature.

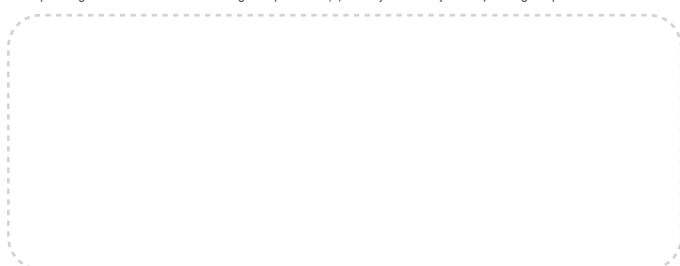

© 2020 Shanghai Huace Navigation Technology Ltd. All rights reserved. The CHC and CHC logo are trademarks of Shanghai Huace Navigation Technology Limited. All other trademarks are the property of their respective owners. Revision May 2020.

WWW.CHCNAV.COM | SALES@CHCNAV.COM

CHC Navigation Headquarter
Shanghai Huace Navigation Technology Ltd.
599 Gaojing Road, Building D,
Shanghai, 201702, China,
+86 21 54260273

CHC Navigation Europe
Infopark Building, Sétány 1, 1117
Budapest, Hungary
+36 20 235 8248 +36 20 5999 369
info@chcnv.eu

CHC Navigation USA LLC
16412 N 92nd Street, Suite 115,
85 260 Scottsdale, Arizona, USA,
+1 480 676 4306

CHC Navigation India
409 Trade Center, Khokhra Circle,
Maninagar East, Ahmedabad,
Gujarat, India
+91 90 99 98 08 02